



230V - 50Hz (1500 rpm)

PERKINS 403A-15G1 | STAMFORD SOL2-G 1ph



# BGPS 11 MF ST

## Emergency Balance Range

Ideal for...



INDUSTRY



RESIDENTIAL



EQUIPMENT

- Weight with liquids without fuel: 635 kg

- Dimensions Plat AK1B:

L: 1850 mm  
W: 862 mm  
H: 1205 mm




Image for orientation purposes. Dagartech reserves the right to modify the data in this technical sheet without prior notice. The weight of the equipment may vary depending on the equipment.



Diesel



EU Stage 0



Water-cooled



Soundproofed



CE Conformity

## 1. General technical data

<b>General technical data</b>	<b>Engine</b>	PERKINS 403A-15G1
	<b>Alternator</b>	STAMFORD SOL2-G 1ph
	Type of execution	G2
	Frequency	50Hz
	Voltage	230V
	Control panel	DSE 6020 MKII
	Fuel tank (l)	70
	Sound level-Lp(A) (dB(A)@7m)	61
	Sound power-LW(A) (dB(A))	89
<b>Power<sup>1</sup></b> (m.p. cos φ 1)	<b>PRP (kVA / kW)</b>	<b>10 / 10</b>
	<b>ESP (kVA / kW)</b>	<b>11 / 11</b>

<sup>1</sup>PRP: Continuous power ("Prime Power"). ESP: Emergency Standby Power according to ISO8528-1.

Maximum active power tolerance (kW) ±5%

<b>Voltage</b>	<b>PRP (kVA/KW)</b>	<b>ESP (kVA/KW)</b>	<b>Amperage (A)</b>
230V	10 / 10	11 / 11	47

## Directives and Regulations

**ENVIRONMENTAL CONDITIONS STANDARD ISO 8528-1:2018:** 25°C, 100kPa and 30% relative humidity:

- Prime Power (PRP):** Data on electrical power available at variable load without limit of hours per year. An overload of 10% is allowed for 1h out of 12. According to ISO 8528-1:2018.
- Emergency Standby Power (ESP):** Data on electrical capacity available at variable load in case of emergency according to ISO 8528-1:2018.

The DAGARTECH Generating Set has EC labelling which includes the following directives:

- 2006/42/EC. Machine Safety Directive.**
- EN ISO 8528-13:2016. Part 13: Safety.** Alternating current generator sets powered by reciprocating internal combustion engines.
- 2014/30/EU. Electromagnetic Compatibility Directive.**
- 2000/14/EC. Noise Emissions Directive.** Sound power levels evaluated in accordance with the procedure laid down in the directive.
- Directive 2011/65/EU** on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS 2).

## 2. Engine specifications

**2.1.  
General  
technical  
data  
of the engine**

Make and model	PERKINS 403A-15G1
r.p.m.	1500
Maximum ESP power (kWm)	13,3
Power PRP (kWm)	12
Fuel	Diesel
No. of cylinders	3 cylinders
Cylinder capacity (c.c.)	1496
Compression ratio	22,5:1
Cooling system	Water-cooled
Type of regulation	mechanical
Type of engine/injection/suction	Diesel/indirect/natural

- **3 cylinders 4-stroke diesel engine online** with mechanical regulation mechanical by means of a fuel pump, original from the manufacturer.


 Emissions compliance  
**EU Stage 0**
**2.2.  
Fuel**

Type of fuel	Diesel		
Fuel tank capacity	70		

- **Direct injection and suction system natural.** Original manufacturer's particle separator filter.

**2.3.  
Consumption  
and autonomy**

	Consumption (l/h)		Autonomy (h)	
	PRP	ESP	PRP	ESP
50%	2	-	34,3	-
75%	2,8	-	25,1	-
100%	3,7	4,1	19,1	17,2

- **Refrigeration through cooling liquid**, fully distributed in the closed circuit run by an engine driven pump, tropicalised radiator, original from the engine manufacturer.

**2.4.  
Cooling  
system**

Fan flow (m³/s)	0,42		
Fan power consumption (kW)	0,2		
Radiator back pressure (Pa)	125		
Total refrigerant capacity (l)	6		

- **Crankshaft-driven pump lubrication system.** The filter is a full-flow insert cartridge, front housing, original from the engine manufacturer.

**2.5.  
Lubrication  
system**

Oil capacity (l)	6		
------------------	---	--	--

- **Air intake system for turbo-fed combustion** with two-stage filter, original from the engine manufacturer.

**2.6.  
Intake system**

Combustion air intake flow (m³/min)	1,1		
-------------------------------------	-----	--	--

- **Electric motor starting system, battery** (no maintenance) **with disconnector and load alternator driven by the starter** 12V, original elements from the engine manufacturer.

**2.7.  
Starter  
system**

No. of batteries	1		
Battery characteristics	12V 60Ah		
Start-up voltage (V)	12V		

 Exhaust attenuation level  
**-25dB(A)**
**2.8.  
Exhaust  
system**

Exhaust gas flow (m³/min)	2,7 [PRP]	2,9 [ESP]
Exhaust gas temperature (°C)	445° [PRP]	490° [ESP]
Exhaust outside diameter (mm)	2" - Ø50mm	
Max. exhaust back pressure (kPa)	10,2	

### 3. Alternator specifications

3.1. General technical data for the alternator	Make and model	STAMFORD S0L2-G 1ph
	No. of poles	4
	Insulation class	H
	No. of threads	12
	Mechanical protection index	IP23
	Voltage Regulator (AVR)	AS540
	Voltage regulation	±1%
	ESP power 27°C (kVA)	14,2
	Power PRP 40°C (kVA)	12,9
	No. of phases	1
Power factor ( $\cos \varphi$ )		1
Performance $\eta$ (%)		
50%	75%	100%
83,3%	82,8%	81,4%
		110%
80,8%		

- **Brushless 4-pole alternator.**

Robust mechanical structure with easy access to connections and components. Insulation class H, coil pitch 2/3 and self-excited AVR.

- **Protection with premium epoxy resins.** High voltage parts are impregnated under vacuum, which always means very good insulation.

Standard regulations that the alternator fulfills:

AS 1359 | IEC 34-1 1 | BS EN 60034-1 | VDE 0530 | BS 5000 | CAN/CSA-C22.2-100 | NEMA MG1-32.

**Low wave distortion:**

- THD (100% load) = 2%
- THF < 2%

Complies with: EN61000-6-3, EN61000-6-2 regarding radio interference.

### 4. Frame Specifications

- Unit mounted on **electro-welded high-resistance steel frame**, painted with epoxy-polyester powder paint.
- Connection of the assembly to the frame by means of **anti-vibration dampers**.
- **Fuel tank located on the frame itself.** The engine is equipped with a measuring gauge and fuel system.
- **Tested in a saline mist chamber according to ASTM B-117-09, resistance 500h.**



### 5. Soundproof canopy Specifications

- Electro-welded **canopy made of high resistance galvanized steel** painted with electrostatic epoxy-polyester powder paint.
- **Interior soundproofing** by means of a lining with soundproofing material.
- **Efficient attenuation silencer -35dB(A)** for the evacuation of gases to the outside with protective cover.
- **Tested in a saline mist chamber chamber according to ASTM B-117-09, resistance 720H. IP44 mechanical protection degree.**



## 6. Control panel

### 6.1. Main elements of the control panel

- Protection panel, distribution with **automatic control module** which allows you to work in manual, automatic or signal mode.
- **Emergency stop button**.
- **Deep Sea Electronics battery charger**, designed to be permanently connected to the battery and maintain 100% of the charge. The charger switches to float mode when charging is complete:



Model	DSE 9150 12V, 3A
-------	------------------

- **Protections:**
  - **4-pole magnetothermic protection** against overloads and short circuits.
  - **Protection fuses** for the control set.

### 6.2. Protection switch

Model	Chint 50A 2P
-------	--------------

### 6.3. Control module

	<table border="1"> <tr> <th>Model</th><th>DSE 6020 MKII</th></tr> </table>	Model	DSE 6020 MKII
Model	DSE 6020 MKII		

DSE 6020 MKII DEEP SEA control card, with mains grid monitor. The genset will automatically start up when detecting a fault in the electric power network and it will turn off automatically as well, when the electrical supply is re-established.

It can also work in manual mode and by signal. It allows you to monitor a wide range of generator parameters and display information alerts, status and alarms.

The module includes USB communication ports, 4 configurable digital inputs, 3 analog inputs, 6 configurable outputs, emergency stop button, 8-35 V battery charger.

It has 132x64p illuminated LCD display with 4 lines of text, 5-key navigation through menus, programmable clocks and alarms, reading and displaying parameter values, including RMS values.

The entire module is easily configurable via PC using the DSE specific software configuration. Different operating modes: AUTOMATIC mode, MANUAL mode, SIGNAL mode and TEST mode.

Other alternative configurations are available upon request to extend the capabilities of the operation modes.

- 1 • Alarm indicator
- 2 • Transfer to the generator (manual mode)
- 3 • Start engine (manual mode)
- 4 • Silence alarm
- 5 • Automatic mode
- 6 • Test mode
- 7 • Manual mode
- 8 • Genset stop
- 9 • Main network transfer (manual mode)
- 10 • Navigation keyboard
- 11 • Main status and instrument display

### Environmental Tests that the module complies with:

BS EN 61000-6-2 (electromagnetic compatibility)  
| BS EN 61000-6-4 (electromagnetic compatibility)  
| BS EN 60950 (electrical safety) | BS EN 61000-6-2 (temperature) | BS EN 60068-2-6 (vibrations)  
| BS EN 60068-2-27 (shock)

## 6. Control panel

### 6.3. Control module



Model	DSE 6020 MKII	DSE 7320 MKII
<b>Operating modes</b>		
STOP mode	✓	✓
MANUAL mode	✓	✓
TEST mode	✓	✓
AUTO mode	✓	✓
<b>Module configuration options</b>		
PC	✓	✓
<b>Group readings</b>		
Generator voltage (F-F)	✓	✓
Generator voltage (F-N)	✓	✓
Generator current (A)	✓	✓
Generator frequency	✓	✓
Generator load F-N (kW / kVA / kVAr)	✓	✓
Total generator load (kW / kVA / kVAr)	✓	✓
Average generator power factor	✓	✓
Accumulated generator load (kW, kWh, kVAh)	✓	✓
<b>Network readings</b>		
Network voltages (ph-N)	✓	✓
Network voltages (ph-ph)	✓	✓
Network frequency	✓	✓
Network current (A)	■	■
Network load ph-N (kW / kVA / kVAr)	■	■
Total network load (kW / kVA / kVAr)	■	■
<b>Engine readings</b>		
Coolant temperature	✓	✓
Oil pressure	✓	✓
Engine fuel level	✓	✓
Engine battery volts	✓	✓
Engine speed	✓	✓
Engine run time	✓	✓

Do you want a superior performance control module?

Contact us and tell us what you need.



✓ Includes      ■ Optional  
✗ Not available      ⓘ Consult

Readings available at control module level.

Confirm the availability of these readings for this generator and engine.



Ask us for further readings in generating sets equipped with electronically managed engines and DSE 7320MKII control module.

## 6. Control panel

### 6.3. Control module



Model	DSE 6020 MKII	DSE 7320 MKII
<b>Engine protections</b>		
High water temperature	✓	✓
Low oil pressure	✓	✓
Low water level	✓	✓
Fuel reserve by sensor	✓	✓
Second fuel tank control	✓	✓
Shutdown failure	✓	✓
Battery voltage failure	✓	✓
Battery charge alternator failure	✓	✓
Overspeed	✓	✓
Underfrequency	✓	✓
Failure to start	✓	✓
Emergency stop	✓	✓
Maintenance notice	✓	✓
Maintenance Alert	✓	✓
<b>Alternator protections</b>		
High frequency	✓	✓
Low frequency	✓	✓
High voltage	✓	✓
Low voltage	✓	✓
Short circuit	✗	✓
Asymmetry between phases	✗	■
Incorrect phase sequence	✗	✓
Reverse power	✗	✓
Breaker Trip 4 poles	■	■
Overpressure alarm	✓	✓
<b>Counters</b>		
Hour meter	✓	✓
Kilowatt meter	✓	✓
Starter counter	✓	✓

Do you want a superior performance control module?

Contact us and tell us what you need.



✓ Includes      ■ Optional  
✗ Not available      ⓘ Consult

Readings available at control module level.

Confirm the availability of these readings for this generator and engine.



Ask us for further readings in generating sets equipped with electronically managed engines and DSE 7320MKII control module.

## 6. Control panel

6.3. Control module		(Standard)	(Option)
Model		DSE 6020 MKII	DSE 7320 MKII
<b>Communications</b>			
RS232	✗	✓	
RS485	✗	✓	
USB communication port	✓	✓	
Modbus IP	■ DSE 855/890/891	■ DSE 855/890/891	
Modbus RS 485	■ DSE 855/890/891	✓	
PC Software (Mimic)	✓	✓	
GSM/GRPS MODEM	■ DSE 890	■ DSE 890	
Remote display < 1km	✗	■ DSE 2520	
Remote monitoring	■ DSE 855/890	■ DSE 855/890	
Input expansion	✗	■ DSE 2130 8 inputs	
Output expansion	✗	■ DSE 2157 8 inputs	
SNMP protocol	■ DSE 892	■ DSE 892	
<b>Services</b>			
Configurable alarm history	50	250	
External start	✓	✓	
Start-up inhibition	■	■	
Network Failure Start	✓	✓	
Activation of group counter	✓	✓	
Activation of grid and group counter	✓	✓	
Control of fuel transfer	✓	✓	
Motor temperature control	✓	✓	
Forced group operation	✓	✓	
Free programmable alarms	✓	✓	
Group start function in test mode	✓	✓	
Free programmable outputs	✓	✓	
Multilingual	Symbols	✓	
<b>Special applications</b>			
GPS localisation	■ DSE 890	■ DSE 890	
Calendar scheduler	✓	✓	
DSE configuration suite via PC	✓	✓	
Front panel module configuration with PIN	✓	✓	
Alternative work	✗	✓	
Programmable PLC	✗	✓	
Power save mode	✓	✓	
Alternative configurations	✓	✓	
Dummy load control / load shedding	✗	✓ 5 Stage dummy load	

Images for orientation purposes. Dagartech reserves the right to modify the data in this technical sheet without prior notice.



Do you want a superior performance control module?

Contact us and tell us what you need.



Ask us for further readings in generating sets equipped with electronically managed engines and DSE 7320MKII control module.



✓ Includes      ■ Optional  
✗ Not available      ⓘ Consult

Readings available at control module level.

**CONFIRM THE AVAILABILITY OF THESE READINGS FOR THIS GENERATOR AND ENGINE.**

## 7. Standard Scope of Delivery

Images for orientation purposes. Dagartech reserves the right to modify the data in this technical sheet without prior notice.



### Engine

- PERKINS 403A-15G1 Diesel Engine, 1500 rpm water cooled.
- With mechanical regulation.
- Protection from moving parts.
- Electric motor starting system, battery (maintenance-free) with switch and load alternator driven by starter motor of 12V.
- Efficient high-attenuation exhaust silencer of -25d(BA) for the evacuation of gases to the outside with protective cover.



### Alternator

- 12-Wire, 4-pole brushless STAMFORD SOL2-G 1ph alternator with electronic voltage regulation type AVR (AS540).
- With IP23 protection level.
- Insulation class H.



### Frame

- Electro-welded frame made of high-strength steel.
- Painted with electrostatic epoxy-polyester powder paint.
- Anti-vibration dampers from the engine block to the frame.
- Fuel tank with capacity of 70 litres, located on the frame itself. Equipped with cleaning record to facilitate maintenance work (models > 75kVA).
- With measuring gauge and installation of fuel to the engine.
- Liquid drainage connection to the outside (models > 75kVA).
- Bedplate tested in a salt spray chamber according to ASTM B-117-09 (500h resistance).



### Soundproof canopy

- Electro-welded canopy of high-strength galvanized steel.
- Painted with electrostatic epoxy-polyester powder paint.
- Interior soundproofing by means of a rigid panel composed of polyurethane foam with an exterior textile covering.
- With IP44 mechanical protection level.
- Cab tested in salt spray chamber according to ASTM B-117-09 (resistance 720h).



### Control panel

- DeepSea Electronics automatic control module DSE 6020 MKII which allows you to work in manual, automatic or signal mode.
  - It offers multiple event logging and is fully configurable through DeepSea Electronics' free-access specific configuration software.
  - Three-phase network and group detection with measurement for configurations upon network failure.
- DeepSea Electronics battery charger DSE 9150 12V, 3A. Designed to be permanently connected to the battery and maintain 100% of the charge. The charger switches to float mode when charging is complete.
- Protections:
  - 4-pole magnetothermic protection against overloads and short circuits.
  - Protection fuses for the control set.



### Other equipment

- Emergency stop button.
- Reinforced pole centrally-mounted (models > 75kVA).



\*CHECK THE SPECIFICATION ACCORDING TO THE MODEL.

## 8. Featured options available

Do you need to include some options to the standard equipment of this generator set to make it the perfect generator for you? We offer you two complete Kits with which to customize your Balance generator set quickly and easily.



### KIT 1: Network failure

Adding an engine heater to your equipment **will ensure that your generator set starts without problems** in the event of any failure in the electrical network, and without the cold or humidity becoming a problem.



### KIT 2: Readings and alarm<sup>1</sup>

Your generator set can provide you with very useful **information** before any breakdown, maintenance work or, simply, during its operation.

If this is an important aspect for you, do not hesitate to include this Kit in your equipment, which has:

- **Radiator level alarm.**
- **Oil pressure reading.**
- **Temperature reading.**



THE READINGS AND ALARM KIT IS INCLUDED IN THE STANDARD SCOPE OF SUPPLY OF THE EQUIPMENT FROM 275KVA OF POWER.



**Check the availability of these options according to the model** and, if you do not find what you are looking for, please contact us. We have many more options to offer you.

<sup>1</sup> Radiator level sensor not available for Baudouin 4M06 series engines.

## 9. Even more options

If you're looking for other features to complete your machine, don't worry.

Below we detail many of the options from the Industrial range that we make available to you to turn your unit into a unique machine.



24 hour tank

### AUTONOMY OPTIONS

**Increase the autonomy of your generator up to 48 hours, including special tanks**

You can choose between **different integrated tanks to increase the autonomy of the unit up to 48 hours** of operation.

**You can also incorporate automatic fuel transfer systems** for supply from external tanks.

		Capacity (l):		24h tank - 160 l		48h tank - Consultar I	
% load		Consumption (l/h)		Autonomy (h)		Autonomy (h)	
Power		PRP	ESP	PRP	ESP	PRP	ESP
50%		2	-	78,4	-	N/A	-
75%		2,8	-	57,3	-	N/A	-
100%		3,7	4,1	43,6	39,2	N/A	N/A



Fuel particle separator filter

### ENGINE - ALTERNATOR OPTIONS

- Electronic engine regulation/management (for models with mechanical regulation)
- Fuel particle separator filter.
- Manual oil drainage pump.
- 6-way fuel valve kit.
- Alternator anti-condensation resistors.
- Alternator superior impregnation systems.
- AVR MX341 + PMG ± 1% STAMFORD.
- AVR MX321 + PMG ± 0.5% STAMFORD.

## 9. Even more options



Central lifting beam

### MECHANICAL OPTIONS

- Retention tray (see change of dimensions).
- Liquid leakage probe (requires retention tray).
- SilentBlocks for levelling.
- Damping - anti-vibration springs.
- Central lifting beam (models < 75kVA)
- Non-standard RAL colour.



DSE 2157



DSE 334 network surveillance

### COMMUNICATION OPTIONS

- Supplement to the DSE 7320 MKII control board (for models with the DSE 6020 MKII control board in the standard scope of supply).
- DSE 2157 8 potential free output (requires DSE 7320MKII).
- DSE 2130 8 inputs (requires DSE 7320MKII).
- DSE 2548 8 LED diodes (requires DSE 7320MKII).
- GSM modem (RS232) (requires DSE 7320MKII).
- DSE 855.
- DSE 890 webnet.
- DSE 7420 module.
- DSE 334 network surveillance.



Socomec motorised switchboard


### POWER OPTIONS

- Differential protection.
- As an option, you can include a switch cabinet attached to the generating set.
  - Switching with Schneider contactors. 25 to 125 A.
  - Socomec motorised switches: ≥ 125A.



CHECK THE AVAILABILITY OF THESE  
OPTIONS DEPENDING ON THE MODEL

**Technical plan for orientation purposes.** Dagartech reserves the right to modify the data in this technical sheet without prior notice.

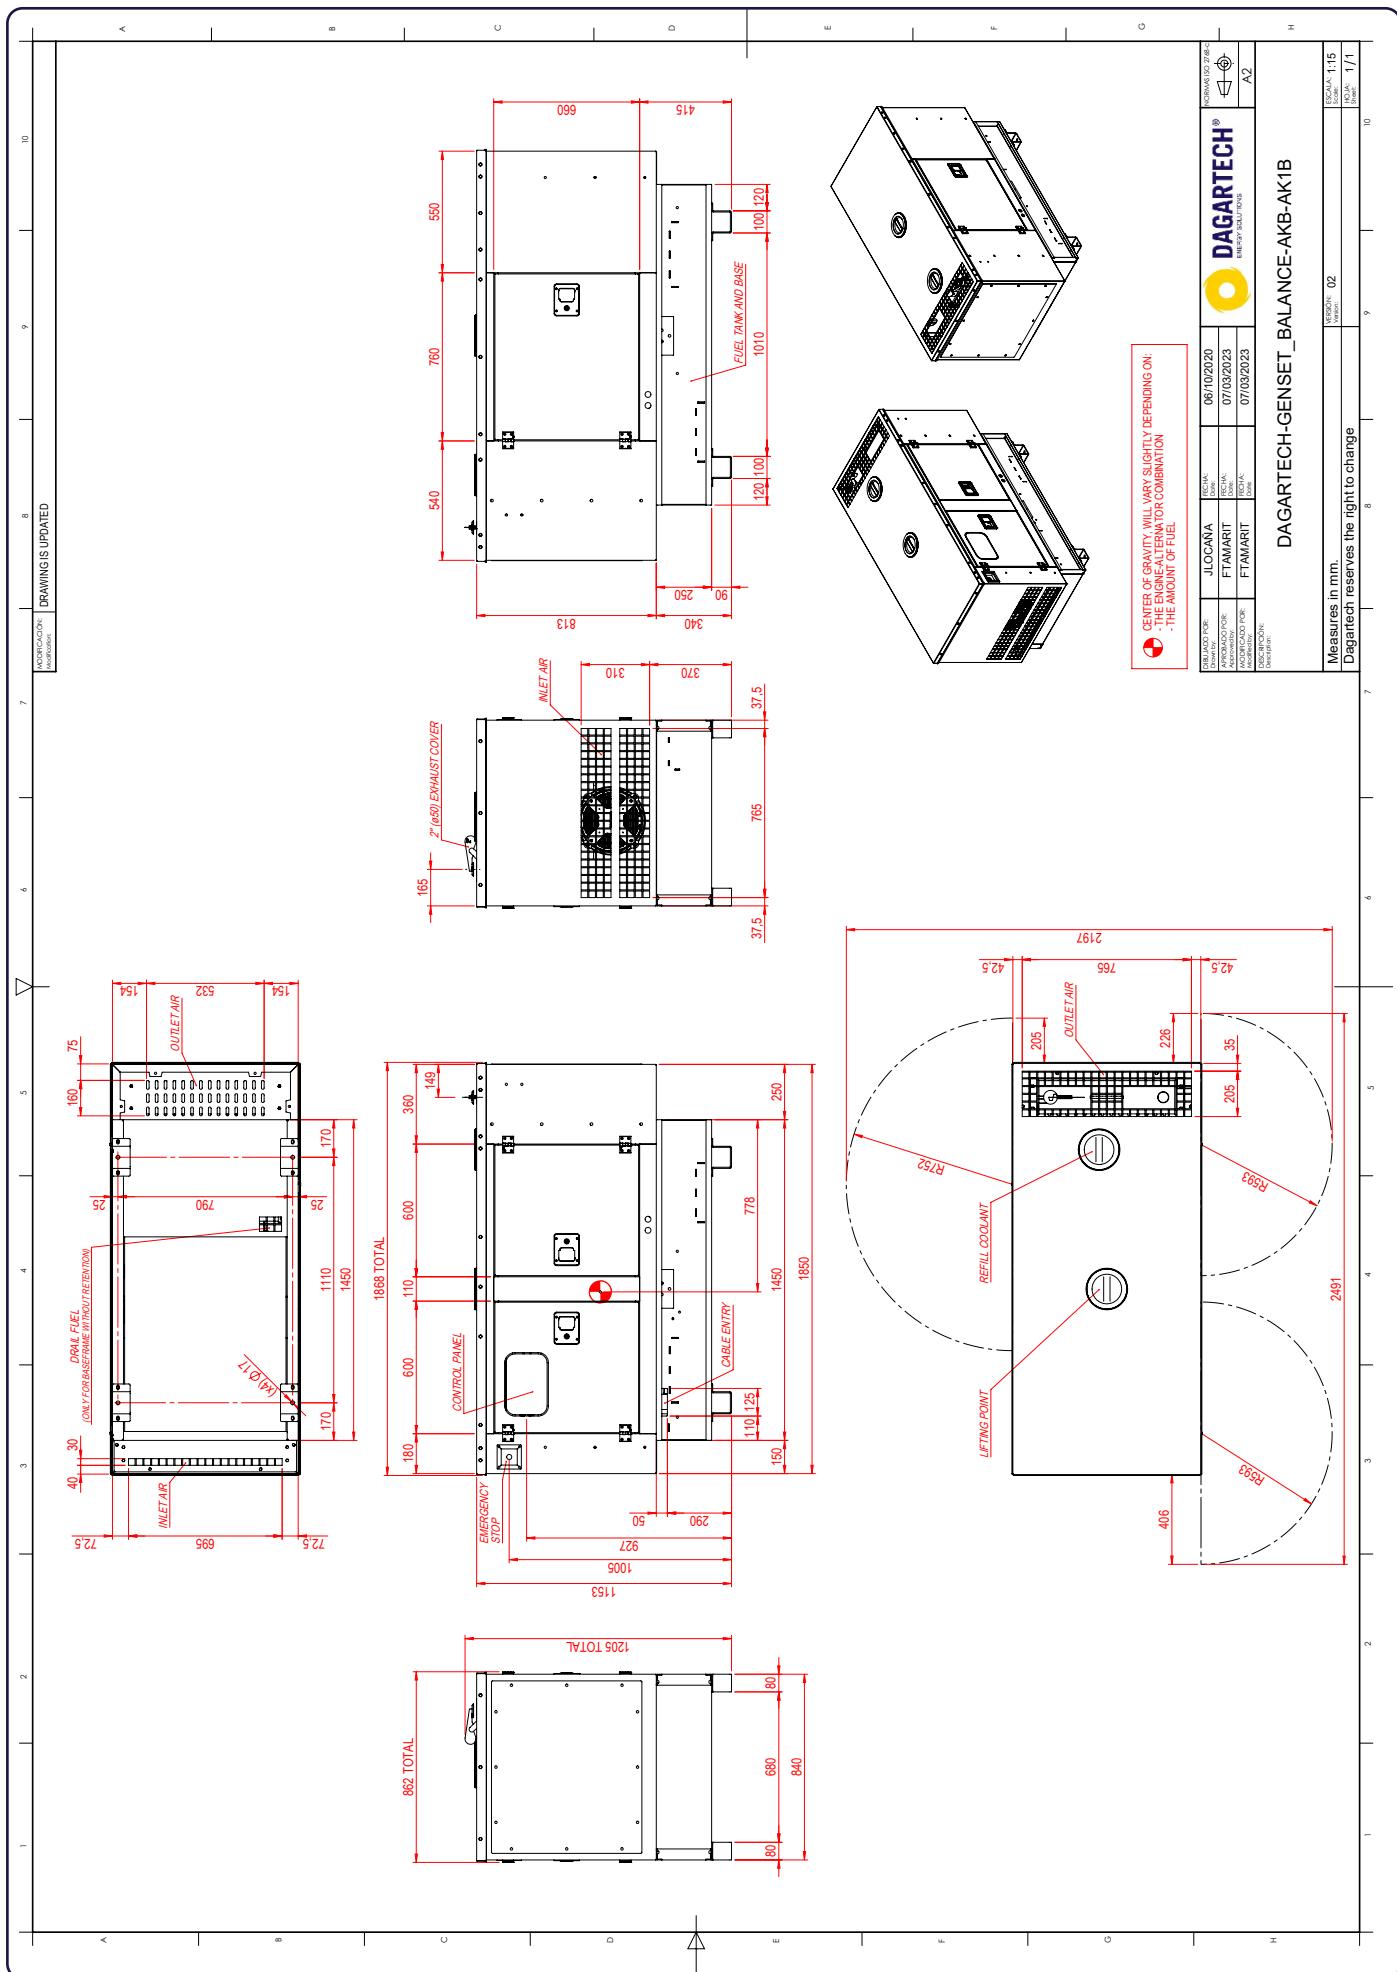

**Technical plan for orientation purposes.** Dagartech reserves the right to modify the data in this technical sheet without prior notice.

